

Table of Contents

SYMBOL LS/DS3408 Bar Code Scanner Notes..... 2
Symbol LS3578-FZ Rugged, cordless scanner with integrated Bluetooth..... 4
Useful Links..... 5

January 9, 2015

Melco Group International, Inc.
5000 WEST ESPLANADE AVENUE
BOX 140
METAIRIE, LA 70006
fax 504.455.3605
support@melcogroup.com
www.melcogroup.com

Memo

Date: December 31, 2014

From: support@melcogroup.com

To: OASIS Warehouse Module Users

RE: SYMBOL LS/DS3408 Bar Code Scanner

Urgent	For Review	Please Comment	Please Reply	As requested
	x			

Programming - Created new scanning capabilities in Warehouse module, this allow a user to utilize the Tracking Label on the cargo to record on the Material Receipt and then when the Loading Guide is produced the user can check items off by scanning the tracking label of each item loaded, this confirms loading and moves items to the 'Scanned' browse box visibly showing items Not Scanned, Scanned, and Errors during Scanning.

There are Two Options:

One Wired and one Wireless.

SYMBOL LS/DS3408 Bar Code Scanner Notes.

1. Cable / Keyboard - connection requires PS2 Cable.

TECHNICAL NOTES:

1. Keep your USB keyboard plugged into the PC
2. On new units follow instructions to connect the **ETHERNET TYPE CONNECTOR** to the base of the LS/DS3408 – refer to **QUICK START GUIDE**.

http://www.barcodedatalink.com/media/pdf/LS3408_Quick_Start_Guide_from_Barcode_Datalink_6713102b.pdf

3. Plug in the Barcode Scanner PS2 connector into the PC.
4. May have to REBOOT PC

January 9, 2015

5. On the Recommended **USER GUIDE** (see #2 link above) Scan SET DEFAULTS (Factory Setting)

6. **SELECT THE BARCODE and SCAN => Keyboard Wedge Host Types**

7. **2nd step is to open document on following link:**

http://www.oasis-web.net/UK/PDF/LS3408_OASIS2.pdf

8. Print the document and Scan the following:

1/7. Set Factory Defaults

4/7. Erase All Rules

5/7 Begin New Rule, 1. Send All that remains,2, Send Extended Key (tab)

6/7. Save Rule

9. The above steps should have programmed the Hand Held Unit.

10. Open up NOTEPAD

11. Make sure you can type on the USB Keyboard & the PS2 Keyboard.

12. Your **LS/DS3408 Bar Code Scanner should be ready to scan cargo with bar codes.**


Please view Video Tutorial for correct operating procedures

<http://www.oasis-web.net/UK/Demos/BarCodeScan.htm>

This example is from a UPS GROUND LABEL.



This is a sample of the Scanned Bar Code scanned into Notepad verifying that unit was scanning.

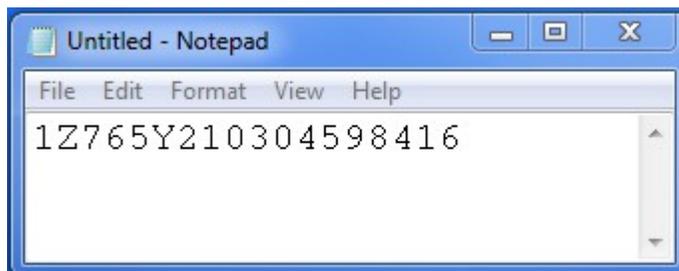

Once above steps are performed your unit should be ready for scanning bar codes.

Symbol LS3578-FZ Rugged, cordless scanner with integrated Bluetooth

A comparable wireless scanner option would be the LS3578 scanner. A USB option will always be cheaper than any other interface option because it is more standard. You will see an increase in cost as cordless/wireless scanners are more expensive. We have included a link of the spec sheet here:

<http://www.barcodesinc.com/pdf/Symbol/ls3578fz.pdf>

Refer to your documentation in order to setup your scanner!

Useful Links

We did not need the following but it is being provided for you as we researched functionality and how to get this to work.

123scan2 scanner configuration utility. Available at <https://posguys.com/blog/code-comments/article/123scan>

also:

<http://www.motorolasolutions.com/US-EN/Business+Product+and+Services/Software+and+Applications/Mobility+Software/Scanner+Drivers+and+Utilities/123Scan2+Configuration+Utility>

Quick Start Videos:

<http://www.motorolasolutions.com/US-EN/Business+Product+and+Services/Software+and+Applications/Mobility+Software/Scanner+Drivers+and+Utilities/Scanner+Videos>

Videos / Webinars:

<http://www.motorolasolutions.com/US-EN/Business+Product+and+Services/Software+and+Applications/Mobility+Software/Scanner+Drivers+and+Utilities/123Scan2+Configuration+Utility>

Picture of gun



~~~end~~~